

SU 19" CABINET

Wall-mounted single-section cabinet with removable side panels

- Designed for indoor applications.
- Available in 6 usable heights and 3 depths (see reference chart).
- The design of the cabinet is based on dismantable frame with safety glass or steel front door and removable rear and side panels.
- Standard version is equipped with two adjustable 19" mounting angles, a knock-out blanking plate and a brush opening (potential cable entry point).
- The rear and side panels, as well as steel door, are provided with earthing connections.
- Cabinets can be fastened directly to the wall without using any brackets - convenient internal access to wallfixing screws.
- Easy change of door opening direction and cable opening layout by rotating by 180°.
- Wide range of supplementary accessories: shelves, drawers, fan kit, power strips etc.
- Cabinet can be equipped with additional rear adjustable 19" mounting angles or mounting profiles.

Technical data

Material:

Frame	- 1.5 mm thick sheet steel
Rear and side panels	- 0.8 mm thick sheet steel
Mounting angles	- 1.5 mm thick sheet steel
Glass door	- 4.0 mm thick safety glass
Steel door	- 0.8 mm thick sheet steel

Surface finishing:

Frame and mounting angles – Al-Zn coated. Steel door, side panels and rear panel – textured powder paint, light grey (RAL 7035). All other colour options on request.

Protection degree:

IP 20 in accordance with EN 60 529 / IEC 529 (does not apply to brush cable entries).

Scope of delivery

Cabinets are packed in cardboard boxes. In the packing there is a template for drilling holes in the wall.



SU cabinet 12 U high with safety glass door




SU cabinet 6 U high - rear view



SU cabinet 6 U high with safety glass door

SU 19" CABINET

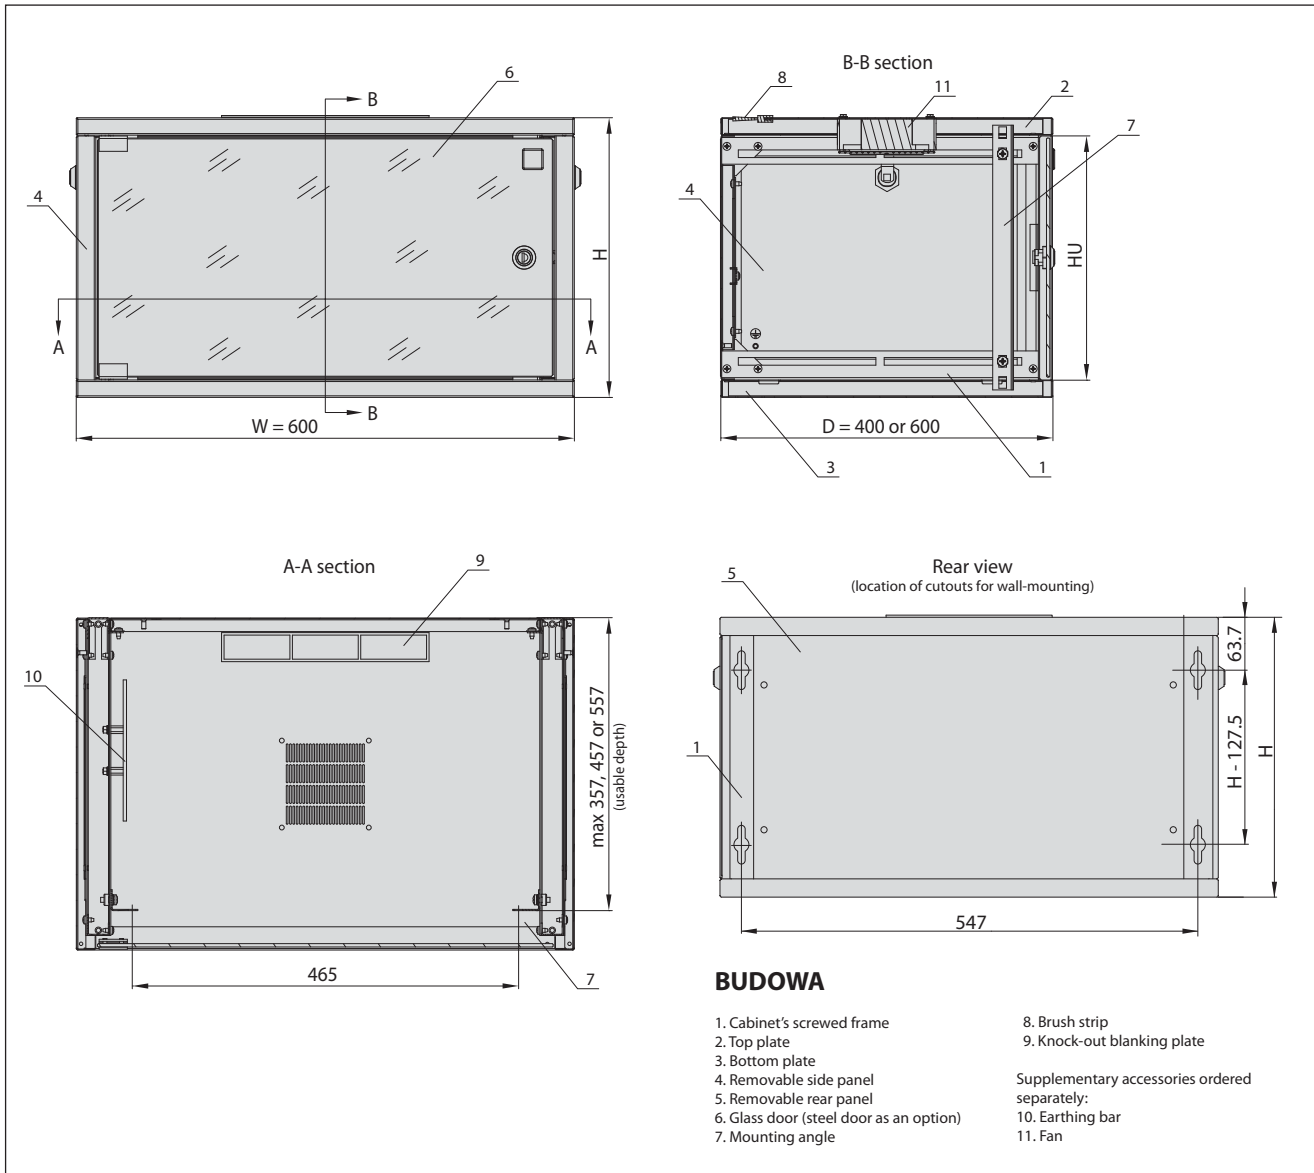

Reference chart

Total width W [mm]	Total depth D [mm]	Total height H [mm]	Usable height HU [U = 44.45 mm]	Maximum load capacity [kg]	Catalogue number	
					Cabinet with glass door	Cabinet with steel door
600	600	871	18 U	30	WZ-3286-01-S6-011	WZ-3286-01-M6-011
		737	15 U	25	WZ-3286-01-S5-011	WZ-3286-01-M5-011
		604	12 U	20	WZ-3286-01-S4-011	WZ-3286-01-M4-011
		515	10 U	16	WZ-3286-01-S3-011	WZ-3286-01-M3-011
		337	6 U	10	WZ-3286-01-S2-011	WZ-3286-01-M2-011
		248	4 U	7	WZ-3286-01-S1-011	WZ-3286-01-M1-011
600	500	871	18 U	35	WZ-3615-01-S6-011	WZ-3615-01-M6-011
		737	15 U	30	WZ-3615-01-S5-011	WZ-3615-01-M5-011
		604	12 U	25	WZ-3615-01-S4-011	WZ-3615-01-M4-011
		515	10 U	20	WZ-3615-01-S3-011	WZ-3615-01-M3-011
		337	6 U	15	WZ-3615-01-S2-011	WZ-3615-01-M2-011
		248	4 U	10	WZ-3615-01-S1-011	WZ-3615-01-M1-011
600	400	871	18 U	45	WZ-2733-01-S6-011	WZ-2733-01-M6-011
		737	15 U	37	WZ-2733-01-S5-011	WZ-2733-01-M5-011
		604	12 U	30	WZ-2733-01-S4-011	WZ-2733-01-M4-011
		515	10 U	25	WZ-2733-01-S3-011	WZ-2733-01-M3-011
		337	6 U	15	WZ-2733-01-S2-011	WZ-2733-01-M2-011
		248	4 U	10	WZ-2733-01-S1-011	WZ-2733-01-M1-011