

## DESCRIPTION


CNFODB-48B is widely used as a termination point for the feeder cable to connect with drop cable. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building. Can be used indoor or outdoor.

## SPECIFICATIONS


Material	ABS or PC+ABS	IP Rate	IP65
Dimension (W*H*D)	420*320*125mm	Weight	3.4kg
Max Splicing (Core)	48 cores	Working temperature	-40°C~+85°C
Relative humidity	≤85% (+30°C)	Atmospheric pressure	70KPa~106 KPa
Insertion loss	≤0.15dB	UPC return loss	≥50 dB
APC return loss	≥60 dB	Life of insertion and extraction	>1000 times



## INSTALLATION

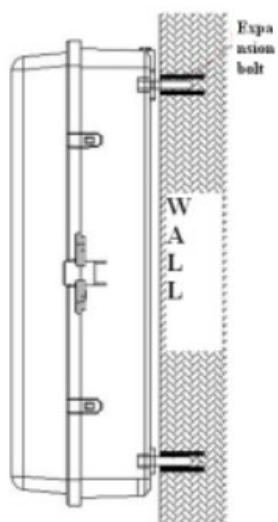

Pic 1 Wall mounted

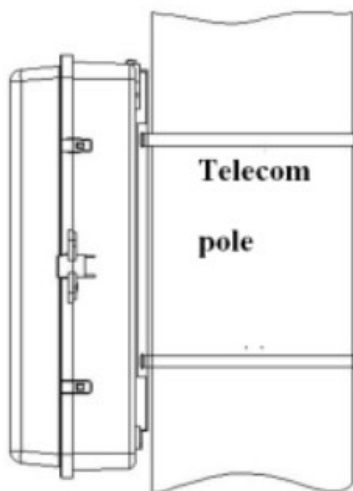

Pic 2 Pole mounted

