

8*10/100/1000Base-T + 2*1G/2.5Base-X SFP

Layer 2+ Managed Industrial Ethernet Switch

DK3310MI-8T2S Series



Features

- 8*10/100/1000Base-T RJ45 ports, 2*1000/2500Base-X SFP slots
- Redundant power 12-58V input with polarity reverse/over-voltage/over-current protection
- Support USB one key configuration and upgrading(optional)
- Support DI/DO/RS485(optional)
- Layer 3 features: Support IPv4/IPv6 static routing, DHCP server
- Support Layer 2 management function: VLAN/VLAN Classification/QinQ/STP, RSTP, MSTP/Port Mirroring/DHCP/Multicast/ACL/IGMP/QoS/LLDP/802.1X/Dying Gasp/SFP DDM/IPV6 management/Web/SNMP/Telnet/TFTP/Web upgrading
- Support G.8032 ERPS protocol, recovery time $\leq 20\text{ms}$
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$

Overview

The DPTEK DK3310MI-8T2S series are highly reliable managed industrial Ethernet switch with 8-port 10/100/1000-T RJ45 and 2-port 1G/2.5GBase-X fiber optical interfaces. They support ERPS redundant network and the self-recovery mechanism is less than 20ms on full load which allows you to scheme a reliable Ethernet network by building a redundant ring topology as your back-up solution. They support IPv4/IPv6 static routing, DHCP server and robust Layer 2 management and secure function, which can fulfill the special needs of industrial automation applications.

DK3310MI-8T2S series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, including wide range power input 12-58VDC, redundant power design with polarity reverse/over-voltage/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. They are the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and critical.

Technical specification

| Model No. | DK3310MI-8T2S / DK3310MI-8T2S-D | |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Interface | Fiber ports | Copper RJ45 ports |
| | 2 | 8 |
| Ethernet | 8*10/100/1000Base-T RJ45 2*1000/2500Base-X SFP | |
| Management port | 1*RJ45 Console port (115200,8,N,1), 1*USB 2.0 (optional) | |
| Data & Alarm channel (optional) | 1 channel RS485 1 channel DI(digital input) 1 channel DO(digital output) | |
| Standard | IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP | |
| LED Indicators | | |
| P (Power indicator) | Off: the device is power off or failed | On: the device power on is normal |

| | | |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| S (System status indicator) | Blinking: device initialization | On: device on normal operation |
| USB (USB status indicator) Green | Off: USB flash drive not insert or not detected by device | |
| | On: USB flash drive is detected by device | |
| | Blinking: the device is reading and writing the data from USB flash drive | |
| ALM(Fault status indicator) Red | Off: Device on normal working state | On: Fault alarm |
| 1-8 (Copper ports indicators) Green | Off: ports link down | |
| | On: ports link up | |
| | Blinking: data on TX/RX | |
| 1-8(Port speed indicators) Yellow | Off: ports on 10/100M | |
| | On: ports on 1000M | |
| 9-10(Fiber ports indicators) Green | Off: ports link down | |
| | On: ports link up | |
| | Blinking: data on TX/RX | |
| Power parameter | | |
| Input voltage | 12-58V DC, redundant power input | |
| Input current | 0.9A Max | |
| Total power consumption | Full loading ≤10W | |
| Connector | Removable 4-pin terminal block | |
| Reverse polarity protection | Support | |
| Over-voltage protection | Support | |
| Over-current protection | Support | |
| Layer 2 functions | | |
| Port aggregation | Support GE port aggregation Support 2.5GE aggregation Support static aggregation Support LACP dynamic aggregation Up to 64 aggregation groups and up to 8 ports per group | |
| Port features | Support IEEE802.3x flow control, Support interface counters, Support port isolation, Port mirroring (One-to-One, Many-to-One) Support loop detection (Port-based; VLAN-based) Support broadcast storm suppression (broadcast; unknown multicast; | |

| | |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | unknown unicast) |
| Mac-address table management | Support static Mac-address management Support dynamic Mac-address Management Support filtering Mac-address Support MAC limit based on port and VLAN Support MAC flapping based on port and VLAN |
| VLAN | Support access mode Support trunk mode Support hybrid mode |
| VLAN classification | Mac Based VLAN IP Based VLAN Protocol Based VLAN |
| GVRP | Normal mode Fixed mode Forbidden mode |
| QinQ | Port-based QinQ VLAN-based QinQ (VLAN-stacking; VLAN-mapping) Flow-based QinQ |
| LLDP | LLDP (Link Layer Discovery Protocol) |
| Ring network protocol | Support IEEE802.1D-STP Support IEEE802.1W-RSTP Support IEEE802.1S-MSTP |
| | Support G.8032 ERPS protocol, single ring, sub Ring and major ring Recovery time ≤20ms |
| L2 Multicast | |
| IGMP snooping | Support IGMP snooping |
| Group address | Support group address |
| Security functions | |
| ACL | IP Standard ACL MAC extend ACL IP extend ACL IPv6 ACL |
| QoS | Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS |
| 802.1x | Port access control Mac-address access control RADIUS server |
| Port-security | Port-security |


| | |
|-----------------------------------------------|------------------------------------------------------------------------------------------|
| IP source guard | IP Port/MAC binding |
| ARP-check | Support ARP-check and ARP packet filtering for illegal users |
| Access control | Support Telnet/SSH/HTTP/HTTPS user access control |
| Management & Maintenance functions | |
| User Management | Support password protection Support user authorization management |
| SNMP | Supporting SNMP V1/V2C/V3 version |
| Web Management | Web Management Support HTTP V1.1 Support HTTPS |
| CLI management | Console/Telnet command line management |
| RMON | Support RMON (Remote Monitoring) alarm |
| Firmware upgrade | Firmware upgrade |
| Fault Detection | Ping/Traceroute Dying gasp Support optical transceiver DDM function |
| Cable detection | Support copper port cable detection |
| NTP | Network Time Protocol |
| Syslog/Debug | Syslog/Debug Syslog send to three servers |
| Configuration import/export | Support FTP/TFTP remote import/export Support USB import/export |
| Dual partition management | Support dual partition switching |
| Application Protocol Functions | |
| DHCP Snooping | DHCP snooping trust port Support remote-id/circuit-id configuration DHCP option-82 |
| DHCP client | Support DHCP client |
| Telnet server | Support telnet server |
| Telnet client | Support telnet client |
| SSH server | Support SSH server Syslog send to two servers |
| TACACS | Support TACACS (the terminal access controller accesses the control system) |
| sflow | Support network traffic analysis |
| TFTP | Support TFTP Client |
| Layer 3 functions | |
| ARP | ARP table aging |

| DHCP server | |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPv4 / IPv6 | static routing |
| Switching features | |
| Switching capacity | 26Gbps |
| Packet forwarding rate | 19.344Mpps |
| MAC address table | 16K |
| VLAN | 4K |
| Buffer | 12Mbit |
| Forwarding delay | <5us |
| Jumbo Frame | Support 10Kbytes |
| MDX/MIDX | Support |
| Watchdog | Support |
| Mechanical structure | |
| Case protection | IP40 |
| Installation method | Din-rail |
| Dimension(W*D*H)mm | 54*115*158mm |
| Weight | DK3310MI-8T2S (1.08 kg); DK3310MI-8T2S-D (1.18 kg) |
| Operating environment | |
| Operating temperature | -40℃~+75℃ |
| Storage/transportation temperature | -40℃~+85℃ |
| Relative humidity | Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH |
| Industrial Standard | |
| EMS | Surge protection of power: IEC 61000-4-5 6KV/4KV(8/20us) Surge protection of Ethernet ports: IEC 61000-4-5 6KV/2KV(10/700us) RS: IEC 61000-4-3 80 MHz-1 GHz: 10 V/m EFT: IEC 61000-4-4 4K/2K CS: IEC 61000-4-6 10V ESD: IEC 61000-4-2 Contact: 8K; Air: 15K |
| EMI | FCC Part 15B Class A |
| Shock | IEC 60068-2-27 |
| Free fall | IEC 60068-2-32 |


| | |
|---------------|-----------------|
| Vibration | IEC 60068-2-6 |
| Certification | CE/FCC/RoHS |
| MTBF | > 200,000 hours |
| Warranty | 5 years |

Structure diagram

DK3310MI-8T2S

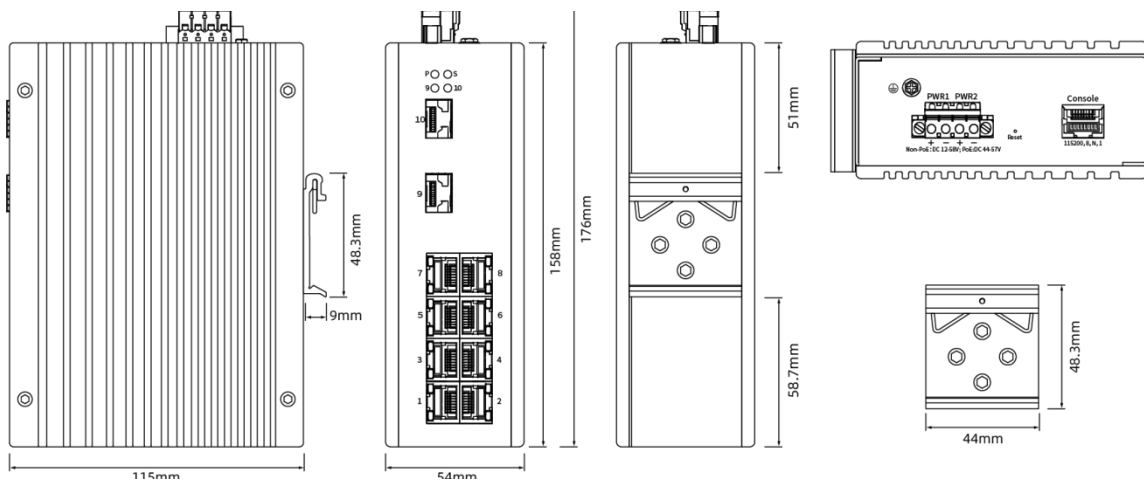

DK3310MI-8T2S-D

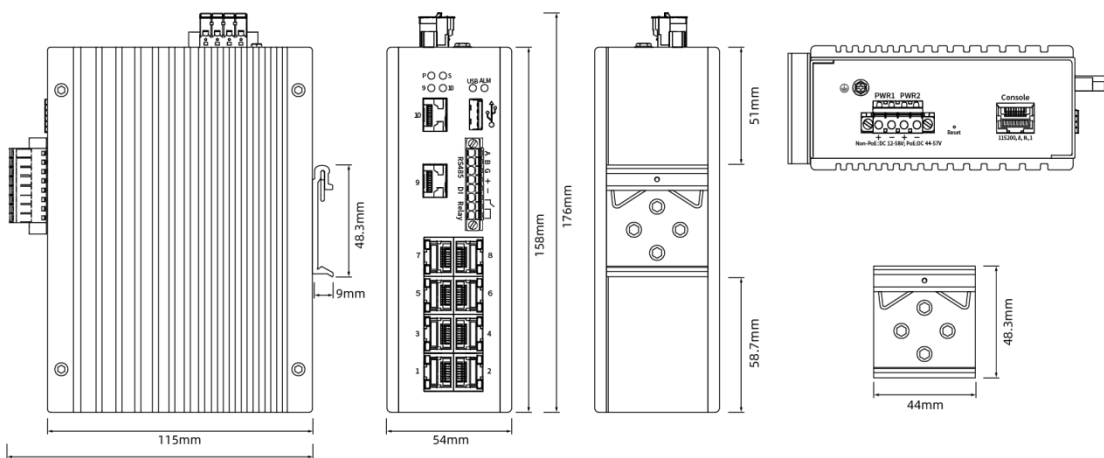

Order information

| Model | Description |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DK3310MI-8T2S | Layer 2+ Managed industrial Ethernet switch with 8*10/100/1000Base-T RJ45 ports and 2*1G/2.5GBase-X SFP slots, DC12-58V input, redundant dual power supply, Din-rail installation. Operation temperature: -40°C~+75°C |
| DK3310MI-8T2S-D | Layer 2+ Managed industrial Ethernet switch with 8*10/100/1000Base-T RJ45 ports and 2*1G/2.5GBase-X SFP slots, supports DI/DO/RS485, DC12-58V input, redundant dual power supply, Din-rail installation. Operation temperature: -40°C~+75°C |