


DATASHEET

Fiber Pigtail ST OM1 -Blue 2m - 1 piece

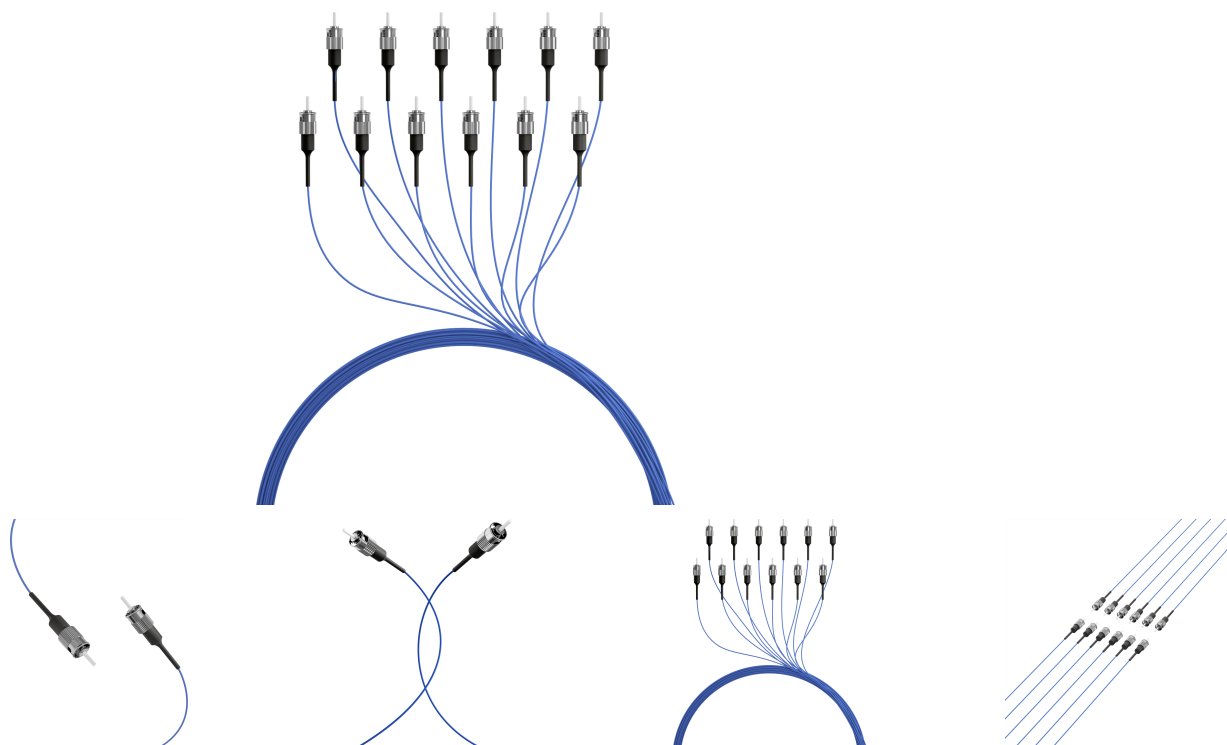

General data

The ST fiber pigtail has a primary coating (900μ) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. Every PU contains an individual measuring protocol.

Allgemeine Daten

Insertion loss 850nm	< 0.3 dB
Core type	Semi tight
Outer Diameter	0.9 mm
APC version	False
Colour	blue
Jacket material	LSZH
Type	Conductor pigtail
Type of connector	ST

General data

Anti-kink sleeve	Put-on
Category	OM1

This datasheet was created automatically on 25-03-2025 . Technical changes reserved.



DATASHEET

Fiber Pigtail ST OM1 -Blue 2m - 1 piece

Mechanical characteristics

Minimaler Biegeradius Dynamic	20xOD
Max. Tension	3 N

Mechanische Eigenschaften

Mion. Bending Radius Static	10xOD
-----------------------------	-------

Kabelaufbau

Fibre type	Multi mode 62.5/125
------------	---------------------

Abmessungen

Length	2.0 m
--------	-------

Umgebungsbedingungen

Operating Temperature	-20 - 70 °C
-----------------------	-------------

Übertragungstechnische Eigenschaften

Quality class Multimode	A/1 according to IEC-61753-222-2
-------------------------	----------------------------------

Normen, Zulassungen, Zertifizierungen

Cable Conform to Standard	IEC60793-2
---------------------------	------------

Standards, approvals, certifications

Connector Conform to Standard	IEC61754-2
-------------------------------	------------

Available variants

ArtNr.	Bezeichnung
03313.2	Fiber Pigtail ST OM1 -Blue 2m - 1 piece


Drawings

This datasheet was created automatically on 25-03-2025 . Technical changes reserved.



DATASHEET

Fiber Pigtail ST OM1 -Blue 2m - 1 piece

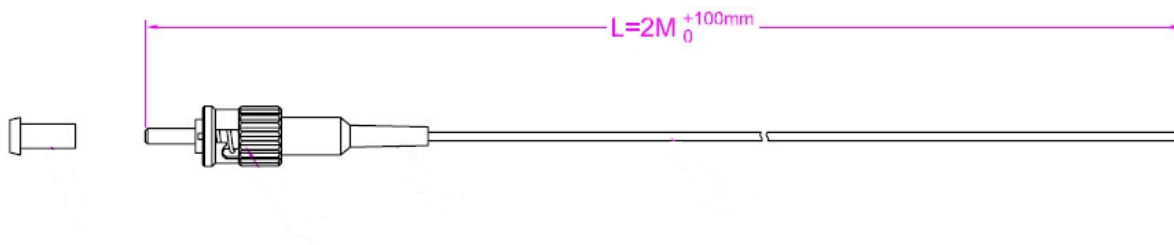

This datasheet was created automatically on 25-03-2025 . Technical changes reserved.

